

# Cyclone Enclosure

**Aquaglide**

Signature Aquapark Feature

**Item Number:** 585220104  
**SKU:** 0790628042796  
**Dimensions:** L 20' x W 15' x H 5.1'  
(L 6,1m x W 4,6m x H 1,6m)  
**Box Dimensions:**  
L 30" x W 22" x H 12", 49 lbs. 1 pc.  
(L 75cm x W 55cm x H 30,5cm, 22 kg)

The Cyclone Enclosure enables the Cyclone Wheel to integrate easily into any aquapark. Featuring six ports for users to exit the Cyclone Wheel, the Cyclone Enclosure also doubles as a balance beam challenge for users waiting for their turn on the wheel.



Includes:

- Cyclone Enclosure
- Repair kit

Not Included:

- Cyclone Wheel
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Enclosing the Cyclone Wheel feature.

Warranty:

3-year limited against any manufacturing defects.

Material:

0.90 mm / oz PVC weight



Construction:

Tubular - welded 3 layer seam

## Mooring Diagram

\* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

Cyclone enclosure includes adequate weight to anchor wheel.  
Cyclone Wheel can also be anchored separately

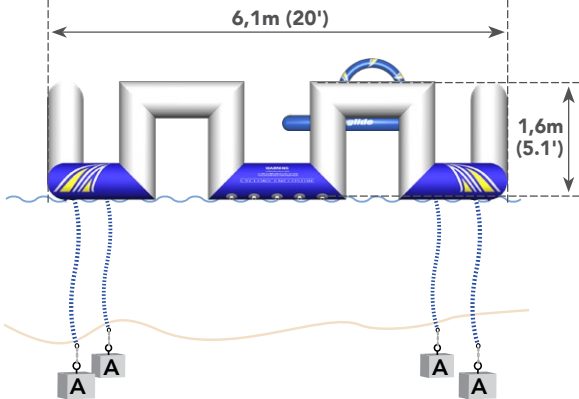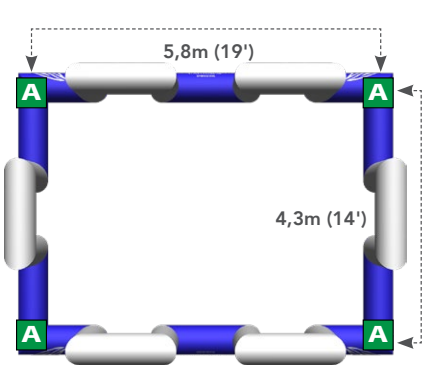

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG   LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M   FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
2   2	181 kg (400 lbs.)	1,5m (4.9ft)	3,0m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5   5	MAIN [1] 2.0 psi (0,138 bar)